

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 2355.00114

First Named Inventor or Application Identifier

AKIHIRO KATAYAMA

Express Mail Label No.

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

6. ☐ Microfiche Computer Program (Appendix)

2. ☒ Specification Total Pages 24

7. Nucleotide and/or Amino Acid Sequence Submission  
(If applicable, all necessary)

3. ☒ Drawing(s) (35 USC 113) Total Sheets 13

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

4. ☒ Oath or Declaration Total Pages 1

c. ☐ Statement verifying identity of above copies

a. ☒ Newly executed (original or copy)

b. ☐ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**  
Signed Statement attached deleting  
inventor(s) named in the prior application, see  
37 CFR 1.63(d)(2) and 1.33(b).

j. ☐ Incorporation By Reference (useable if Box 4c is checked)  
The entire disclosure of the prior application, from which a copy of  
the oath or declaration is supplied under Box 4c, is considered as  
being part of the disclosure of the accompanying application and is  
hereby incorporated by reference therein.

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

14. ☐ Small Entity ☐ Statement filed in prior application  
Statement(s) Status still proper and desired

15. ☒ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

16. ☒ Other: Claim to priority

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

Country

State

Telephone

Zip Code

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	31-20 =	11	X \$ 18.00 =	\$ 198.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	5-3 =	2	X \$ 78.00 =	\$ 156.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$ 260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
				Total of above Calculations =	\$ 1044.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
				TOTAL =	\$ 1044.00

19. Small entity status


- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 1044.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Brian L. Klock - Reg. No. 36,570
SIGNATURE	
DATE	February 9, 2000

BLK/cmv

TITLE OF THE INVENTION  
IMAGE PROCESSING METHOD AND APPARATUS, AND STORAGE MEDIUM

FIELD OF THE INVENTION

5

The present invention relates to an image processing apparatus and method for reconstructing an image, which records image information appended with quantized space information in units of pixels such as  
10 image information expressed by, e.g., a ray space theory, in a virtual space and, more particularly, to an improvement for assuring a high rendering frame rate by lowering resolution as, e.g., motion in the space gets faster upon reconstructing an image in a virtual space  
15 on the basis of recorded image information.

BACKGROUND OF THE INVENTION

Attempts to describe a virtual space on the basis  
20 of a ray space theory have been proposed. See, for example, "Implementation of Virtual Environment by Mixing CG model and Ray Space Data", IEICE Journal D-11, Vol. J80-D-11 No. 11, pp. 3048 - 3057, November 1997, or  
"Mutual Conversion between Hologram and Ray Space Aiming  
25 at 3D Integrated Image Communication", 3D Image Conference, and the like.

A recording method of ray space data will be explained below.

As shown in Fig. 1, a coordinate system O-X-Y-Z is defined in a real space. A light ray that passes through a reference plane P ( $Z = z$ ) perpendicular to the Z-axis is defined by a position  $(x, y)$  where the light ray crosses P, and variables  $\theta$  and  $\phi$  that indicate the direction of the light ray. More specifically, a single light ray is uniquely defined by five variables  $(x, y, z, \theta, \phi)$ . If a function that represents the light intensity of this light ray is defined as  $f$ , light ray group data in this space can be expressed by  $f(x, y, z, \theta, \phi)$ . This five-dimensional space is called a "ray space".

If the reference plane P is set at  $z = 0$ , and disparity information of a light ray in the vertical direction, i.e., the degree of freedom in the  $\phi$  direction is omitted, the degree of freedom of the light ray can be regenerated to two dimensions  $(x, \theta)$ . This  $x$ - $\theta$  two-dimensional space is a partial space of the ray space. As shown in Fig. 3, if  $u = \tan\theta$ , a light ray (Fig. 2) which passes through a point  $(X, Z)$  in the real space is mapped onto a line in the  $x$ - $u$  space, said line is given by:

$$X = x + uZ \quad (1)$$

Image sensed by a camera reduces to receiving light rays that pass through the lens focal point of the camera at an image sensing surface, and converting their brightness levels and colors into an image. In other words, a light ray group which passes through one point, i.e., the focal point, in the real space is captured as an image a number of pixels. In this, since the degree of freedom in the  $\phi$  direction is omitted, and the behavior of a light ray is examined in only the X-Z plane, only pixels on a line segment that intersects a plane orthogonal with respect to the Y-axis need to be considered. In this manner, by sensing an image, light rays that pass through one point can be collected, and data on a single line segment in the x-u space can be captured by single image sensing process.

When this image sensing is done a large number of times by changing the view point position, light ray groups which pass through a large number of points can be captured. When the real space is sensed using N cameras, as shown in Fig. 4, data on a line given by:

$$x + Z_n u = X_n \quad (2)$$

can be inputted in correspondence with a focal point position  $(X_n, Z_n)$  of the n-th camera  $C_n$  ( $n = 1, 2, \dots, N$ ), as shown in Fig. 5. In this way, when an image is sensed from a sufficiently large number of view points, the x-u space can be densely filled with data.

Conversely, an observation image from a new arbitrary view point position can be generated (Fig. 7) from the data of the x-u space (Fig. 6). As shown in Fig. 7, an observation image from a new view point position E(X, Z) indicated by an eye mark can be generated by reading out data of a line given by equation (1) from the x-u space.

One major feature of ray space data is that ray space data is defined for each pixel. That is, frame data for one scene is expressed by ray space data corresponding to the number of pixels of that frame. Hence, the data size of ray space data does not depend on the complexity of a scene, but depends on only the size and resolution of the scene; the computation volume depends only on the total number of pixels of the scene to be generated. In case of normal CG data, when a scene becomes more complex, the complexity cannot be expressed unless the number of polygons is increased. Hence, the computation volume increases, resulting in low rendering performance. However, in case of ray space data, if the total number of pixels of an image to be rendered remains the same, rendering performance is constant independently of the complexity of scenes.

A case will be examined wherein the user walks through a virtual space generated using such ray space data. In such case, several ten frames of images per sec

must be generated and presented to make the user feel as if he or she was walking through the virtual space.

However, when the total number of pixels of an image reconstructed from ray space data in each frame is large, a long rendering time per frame is required, and the rendering frame rate cannot catch up with the moving speed.

When the user manipulates (moves, rotates, or the like) an object in the scene at high speed, and that object is generated and rendered based on ray space data, if the number of pixels of the object is large, rendering cannot be done in time.

#### SUMMARY OF THE INVENTION

15

The present invention has been proposed to solve the conventional problems, and has as its object to provide an image processing apparatus and method, which reconstruct an image by capturing image information at resolution below that of image information at time of recording by lowering the sampling rate when no problem is expected even if lowering resolution (e.g., an object moving in a space), upon reconstructing an image from image data such as ray space data, image information of which includes space information, thereby assuring high rendering frame rate.

In order to achieve the above object, an image processing apparatus of the present invention comprises:

recording means for recording image information appended with quantized space information in units of  
5 pixels;

setting means for setting a sampling rate;

reconstruction means for reconstructing an image by reading out image information from the recording means in accordance with the sampling rate set by the  
10 setting means; and

interpolation means for interpolating pixels at empty pixel positions to obtain a resolution of an image required for display when the reconstruction means reconstructs the image at a resolution lower than the  
15 resolution of the image required for display.

When the sampling rate is determined on the basis of, e.g., the moving speed in the virtual space, image information is read out at that sampling rate to reconstruct an image. When the sampling rate is below  
20 that of the recording resolution, the time required for reconstructing an image can be shortened. In addition, a decrease in resolution can be compensated for by pixel interpolation (e.g., texture mapping).

A method of the present invention as another  
25 arrangement for achieving the above object is an image processing method for reconstructing an image which is



recorded as ray space data in recording means according to a first resolution, comprising:

a step of detecting a moving speed in a space of a reconstructed image;

5 a step of determining a second resolution of ray space data to be read out from the recording means in accordance with a detected moving speed in the space, and reading out ray space data from the recording means in accordance with the second resolution; and

10 a step of interpolating pixels at empty pixel positions produced in correspondence with dropping to the second resolution smaller than the first resolution.

The above object can also be achieved by an image processing method or a storage medium that stores a  
15 program for implementing this method.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or  
20 similar parts throughout the figures thereof.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated  
25 in and constitute a part of the specification, illustrate embodiments of the invention and, together

with the description, serve to explain the principles of the invention.

Fig. 1 is a view for explaining the principle of generating ray space data;

5        Fig. 2 is a view for explaining data in a real space;

Fig. 3 is a view showing the space shown in Fig. 2, which is expressed by ray space data;

Fig. 4 shows a plurality of cameras to explaining  
10       principle of generating real space data;

Fig. 5 shows the view of each of a plurality of cameras for explaining the principle of generating ray space data;

Fig. 6 is a view for explaining the principle of  
15       reconstructing a real space from ray space data when there are a plurality of cameras;

Fig. 7 is a view for explaining the principle of reconstructing a real space from ray space data when there are a plurality of cameras;

20       Fig. 8 is a view for explaining quantization in an embodiment of the present invention;

Fig. 9 is a view for explaining storage of ray space data in the embodiment of the present invention;

Fig. 10 is a view for explaining sampling and  
25       storage of ray space data in the embodiment of the present invention;

Fig. 11 is a block diagram showing the hardware arrangement of the embodiment of the present invention; and

Fig. 12 is a flow chart showing the control sequence in the embodiment of the present invention.

Fig. 13 is a flow chart showing the process in the modification 1 of the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will now be described in detail in accordance with the accompanying drawings.

An image processing apparatus and method to which the present invention is applied will be described in detail hereinafter with reference to the accompanying drawings. In this image processing apparatus and method, when the user walks through a virtual space or manipulates (moves, rotates, or the like) an object in the virtual space expressed by ray space data, the rendering frame rate can catch up with the moving speed in the space by lowering the resolution by decreasing the sampling rate of ray space data, and the decrease in resolution is compensated for by pixel interpolation such as texture mapping.

Fig. 8 is a view for explaining quantization of ray space data of this embodiment. More specifically, assume that ray space data to be processed by the image processing apparatus of this embodiment is image data obtained using a camera which has a CCD having N pixels in the main scanning direction, a field angle  $w$ , and an intersection angle  $\alpha$  between the optical axis and Z-axis. If the pixels of the CCD are respectively ordered  $0, \dots, N-1$ ;  $\theta$  represents the angle the light ray which passes through the  $j$ -th pixel makes with the Z-axis; and  $x$  represents the position where the light ray which passes through the  $j$ -th pixel intersects with the X-axis, we have:

$$\frac{N}{2} \tan(\theta - \alpha) = \left( \frac{N}{2} - j \right) \tan\left(\frac{w}{2}\right) \quad (3)$$

Note that mapping in Fig. 8 is done with respect to the Y-axis. If equation (3) holds for the  $j$ -th pixel on  $Y = m$ -th line ( $m =$  an arbitrary number), the angle  $\theta$  corresponding to pixel  $j$  can be computed from equation (3). That is, if  $I''(i)$  represents the  $i$ -th image data, and that image data is converted into image data  $I'$  in an  $(x, \theta)$  space, which is further converted into image data  $I$  in an  $(x, u)$  space by  $u = \tan\theta$ , this process is expressed by:

$$I''(i) = I'(x, \theta) = I(x, u) \quad (4)$$

u and x are appropriately quantized. For example,  
as for the x-axis, the spacing between two neighboring  
light rays on the x-axis is obtained, and quantization  
is done using this spacing in a quantization step. Also,  
5 as for the u-axis, quantization is done using the  
tangent of an angle between two neighboring pixels and  
the camera view point position.

In this manner, ray space data become points  
discretely sampled on a line, as shown in Fig. 10.  
10 Smoothness of movement when the user or object  
moves at high speed in the virtual space depends on the  
rendering frame rate. That is, as the rendering frame  
rate goes higher, the user or object can experience  
smoother movement in the virtual space. But if the frame  
15 rate is low, the user or object may experience unnatural  
sensation since the low frame rate results in jerky  
motion. Hence, in order to implement smooth movement in  
virtual space when the moving speed of the user or  
object is high, the rendering rate must be higher  
20 improved. However, this means an increase in the total  
number of pixels of an image to be reconstructed from  
ray space data and, hence, rendering may not be done in  
time. To solve this problem, in this embodiment the  
sampling rate in Fig. 10 is changed. That is, if  
25 sampling of every two pixels is fast enough to catch up  
with rendering, every two pixels are sampled. User's

moving speed is detected by the movement of a mouse in this embodiment. If this speed is assumed to be  $v$  cm/s, the degree of load on rendering at that time is  $k.v$  ( $k$  is a predetermined constant). The sampling rate,  $n$ , must  
5 assume a highest possible value. The sampling rate  $n$  (pixel interval) is a function of the load  $k.v$ . The sampling rate  $n$  assumes a numerical value that may retard rendering if it is set to be lower than that value, and can be determined in advance in accordance  
10 with the rendering speed of this system and the value of the load  $k.v$ . When said  $n$  is determined, ray space data are sampled at  $n$ -sample intervals in Fig. 10. The data size to be processed is decreased by sampling at  $n$ -pixel intervals to cope with movement of the user or object or  
15 scrolling. Even when the resolution lowers by decreasing the data size, while the user or object is moving in the space, the visual characteristics of the user who is observing that movement, i.e., identification performance for details of a moving object or scene  
20 impairs, so a space with lower resolution does not pose any problem.

Fig. 11 shows the system arrangement of this embodiment. The hardware arrangement shown in Fig. 11 is that of a normal workstation. Referring to Fig. 11,  
25 especially, a disk 25 stores a large volume of ray space data, as shown in Fig. 9. This system presents a virtual

space to the user on a CRT 23. At this time, the user can freely walk through that virtual space or can manipulate (move, rotate, or the like) an object in the virtual space by operating a mouse 28. The walk through  
5 speed or manipulating speed of the object is the moving speed of the mouse 28. Fig. 12 shows the control sequence of the system shown in Fig. 11.

When the system is started up in step S2, the moving direction and moving amount  $v$  of the mouse are  
10 computed on the basis of user operation for the mouse 28 in step S4. In step S6, the image size is determined from the size of the display range of the CRT 23. In step S8, the sampling rate  $n$  (pixels) is determined from the moving amount  $v$  of the mouse, and ray space data are  
15 read out at this sampling rate  $n$  (pixels) from the disk 25 to reconstruct an image.

In step S10, the image is enlarged. Since image reconstruction done in step S8 is decimation at the sampling rate  $n$ , the image is reduced. Hence, the image  
20 is enlarged to the image size determined in step S6. This enlargement is implemented using a texture mapper 24, a known hardware tool. In this manner, image interpolation is done, and image display at the required resolution is implemented.

25 Various modifications of the present invention may be made.

Modification 1:

In the above embodiment, an image is reconstructed from a ray space data image database located at the same site. Also, the present invention can be applied to a case wherein the database is located at a remote location and connected via a network. This is because when the system of the present invention is used via the network, variations of the transfer rate depending on the load on the network pose the same problem as that posed when the walk through speed of the viewer (user) exceeds the rendering rate. That is, even when change or motion of an image is small, a jerky image may be presented as the frame rate drops via the network. This is because the CPU of the receiving image processing apparatus cannot receive data fast enough even if it has more than adequate capacity. When the present invention is applied to solve such problem, by setting the sampling rate of image data between the transmitting and receiving apparatuses in accordance with the data transport rate of the network, a smoothly moving image can be provided although image quality deteriorates to some extent.

Fig. 13 shows process of modification 1. When a process shown in the Fig. 13 is the same process shown in the Fig. 12, the process shown in the Fig. 13 is marked the number as the process shown in the Fig. 12.



The explanator is omitted. The differences between process shown in the Fig. 13 and the process shown in the Fig. 12 are judgement the data transport rate of the network in step S31, and setting sampling rate of the  
5 image by referring data transport rate in a process of a image creating in step S81.

#### Modification 2:

The moving speed can be detected by means other  
10 than the mouse. That is, the walk through or scrolling speed need only be detected.

In the above embodiment, the load is assumed to linearly increase with respect to the moving speed of the user. However, the present invention is not limited  
15 to such assumption. For example, the resolution (the total number of pixels of an image) may be set in inverse proportion to the square of the speed. Furthermore, the resolution may be determined by actually measuring the speed.

#### 20 Modification 3:

In the above embodiment, ray space data are obtained by computations, but may be pre-stored as a table in a RAM or ROM.

#### Modification 4:

The display device is not limited to the CRT. The present invention can also be applied to a lenticular or HMD display device.

To restate, according to the present invention,  
5 even when the virtual space defined by image data such as ray space data imposes a heavy processing load on a computer, an increase in load can be suppressed by lowering the resolution by decreasing the sampling rate. Especially, when the processing load increases upon  
10 movement in the virtual space by user operation or movement of an object in the virtual space, a decrease in resolution by decreasing the sampling rate does not pose any problem to user's vision. Since human's visual characteristics that perceptual sensitivity to object  
15 moving is low, deterioration of image quality can be ingored.

As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood  
20 that the invention is not limited to the specific embodiments thereof except as defined in the claims.

WHAT IS CLAIMED IS:

1. An image processing apparatus comprising:
  - recording means for recording image information
  - 5 appended with quantized space information in units of pixels;
  - setting means for setting a sampling rate;
  - reconstruction means for reconstructing an image by reading out image information from the recording
  - 10 means in accordance with the sampling rate set by the setting means; and
  - interpolation means for interpolating pixels at empty pixel positions to obtain a resolution of an image required for display when the reconstruction means
  - 15 reconstructs the image at a resolution lower than the resolution of the image required for display.
2. The apparatus according to claim 1, wherein the image information is expressed by a ray space theory.
3. The apparatus according to claim 1, wherein the
- 20 setting means determines the sampling rate on the basis of the moving speed in a virtual space designated by a user.
4. The apparatus according to claim 1, wherein the setting means determines the sampling rate on the basis
- 25 of the manipulation speed of an object in a virtual space designated by a user.

5. The apparatus according to claim 1, wherein the interpolation means interpolates empty pixel positions by texture mapping.

6. The apparatus according to claim 3, wherein the moving speed in the virtual space is determined by detecting the moving speed of a mouse.

7. The apparatus according to claim 4, wherein the moving speed in the virtual space is determined by detecting the moving speed of a mouse.

10 8. The apparatus according to claim 3, wherein the manipulation speed of the object in the virtual space is determined by detecting the moving speed of a mouse.

9. The apparatus according to claim 4, wherein the manipulation speed of the object in the virtual space is determined by detecting a moving speed of a mouse.

10. An image processing method for reconstructing an image obtained by recording image information appended with quantized space information in units of pixels, comprising:

20 a setting step of setting a sampling rate;

a reconstruction step of reconstructing an image by reading out image information from a recording means in accordance with the sampling rate set in the setting step; and

25 an interpolation step of interpolating pixels for empty pixel positions to obtain a resolution of an image

required for display when the image is reconstructed in the reconstruction step at a resolution lower than the resolution of the image required for display.

11. The method according to claim 10, wherein the  
5 image information is expressed by a ray space theory.
12. The method according to claim 10, wherein the setting step includes a step of determining the sampling rate on the basis of a moving speed designated by a user in a virtual space.
- 10 13. The method according to claim 10, wherein the setting step includes a step of determining determines the sampling rate on the basis of a manipulation speed designated by a user of an object in a virtual space.
14. The method according to claim 10, wherein the  
15 interpolation step includes a step of interpolating empty pixel positions by texture mapping.
15. The method according to claim 12, wherein the moving speed in the virtual space is determined by detecting the moving speed of a mouse.
- 20 16. The method according to claim 13, wherein the manipulation speed of the object in the virtual space is determined by detecting the moving speed of a mouse.
17. An image processing method for reconstructing an image which is recorded as ray space data in recording  
25 means according to a first resolution, comprising:

a step of detecting a moving speed in a space of  
the reconstructed image;

a step of determining a second resolution of ray  
space data to be read out from the recording means in  
5 accordance with the detected moving speed in the space,  
and reading out ray space data from the recording means  
in accordance with the second resolution; and

a step of interpolating pixels at empty pixel  
positions produced in correspondence with dropping to  
10 the second resolution smaller than the first resolution.

18. A storage medium for storing a computer program  
for a computer implementation of the method of claim 10.

19. An image processing apparatus comprising:  
recording means for recording image information  
15 appended with quantized space information in units of  
pixels;

setting means for setting a sampling rate;

reconstruction means for reconstructing an image  
by reading out image information from the recording  
20 means in accordance with the sampling rate set by the  
setting means;

designnning means for designnning a change speed of  
a reconstructed image;

changing resolution meaning for controlling  
25 resolution of the image by changing the sampling rate in

accordance with the designning by the designning  
meaning; and

interpolation means for interpolating between  
pixels on the basis of a resolution.

5 20. The apparatus according to claim 19, wherein the  
image information is expressed by a ray space theory.

21. The apparatus according to claim 19, wherein the  
designning means determines the sampling rate on the  
basis of the moving speed in a virtual space designated  
10 by a user.

22. The apparatus according to claim 21, wherein the  
designning means determines the sampling rate on the  
basis of the manipulation speed of an object in a  
virtual space designated by a user.

15 23. The apparatus according to claim 19, wherein the  
interpolation means interpolates between pixels by  
texture mapping.

24. The apparatus according to claim 22, wherein the  
moving speed in the virtual space is determined by  
20 detecting the moving speed of a mouse.

25. An image processing method for reconstructing an  
image obtained by recording image information appended  
with quantized space information in units of pixels,  
comprising:

25 a setting step of setting a sampling rate;

a reconstruction step of reconstructing an image by reading out image information from a recording means in accordance with the sampling rate set in the setting step;

- 5           a designning step of designning a change speed of a reconstructed image;

          a changing resolution step of controlling resolution of the image by changing the sampling rate in accordance with the designning in the designning step;

- 10       and

          a interpolation step of interpolating between pixels on the basis of a resolution.

26.   The method according to claim 25, wherein the image information is expressed by a ray space theory.

- 15   27.   The method according to claim 25, wherein the designning step includes a step of determining sampling rate on the basis of the moving speed in a virtual space designated by a user.

28.   The method according to claim 27, wherein the  
20   designning step includes a step of determining the sampling rate on the basis of the manipulation speed of an object in a virtual space designated by a user.

29.   The method according to claim 25, wherein the interpolation step includes a step of interpolating  
25   between pixels by texture mapping.




30. The method according to claim 28, wherein the moving speed in the virtual space is determined by detecting the moving speed of a mouse.
31. A storage medium for storing a computer program
- 5 for a computer implementation of the method of claim 25.


ABSTRACT OF THE DISCLOSURE

An image processing apparatus includes recording unit which has recorded image information appended with  
5 quantized space information in units of pixels; setting unit for setting a sampling rate in accordance with moving speed in a virtual space; reconstruction unit for reconstructing an image by reading out image information from the recording unit in accordance with the sampling  
10 rate set by the setting unit, and interpolation unit for interpolating pixels at empty pixel positions to obtain a resolution of an image required for display when the reconstruction unit reconstructs the image at a resolution lower than the resolution of the image  
15 required for display.

FIG. 1

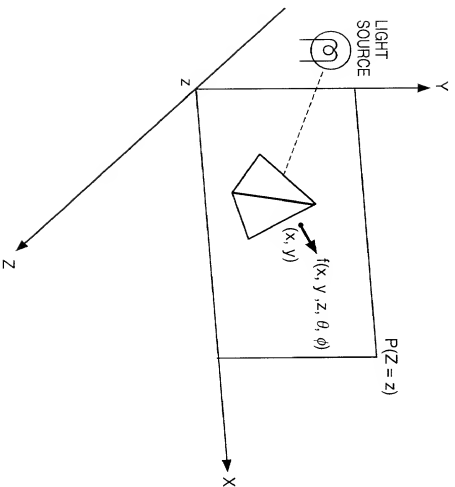

**FIG. 2**

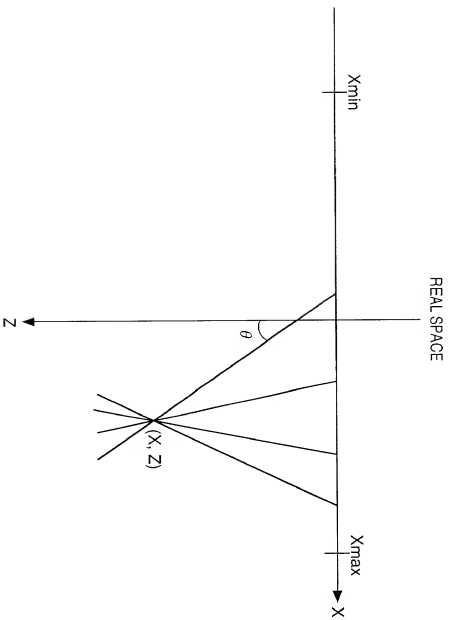

**FIG. 3**

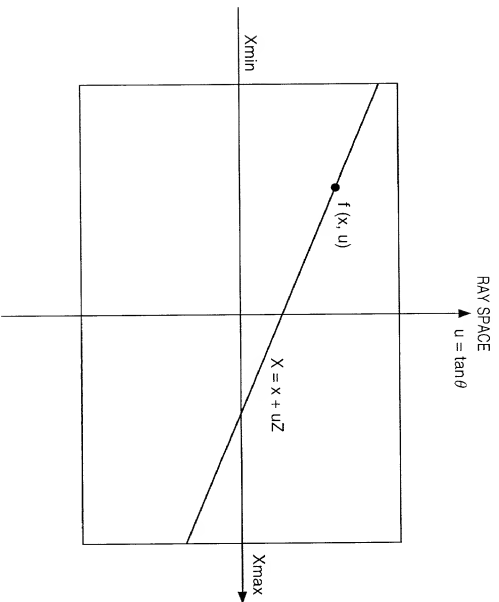


FIG. 4

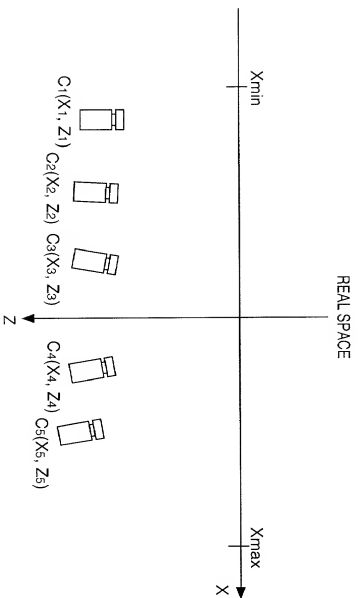


FIG. 5



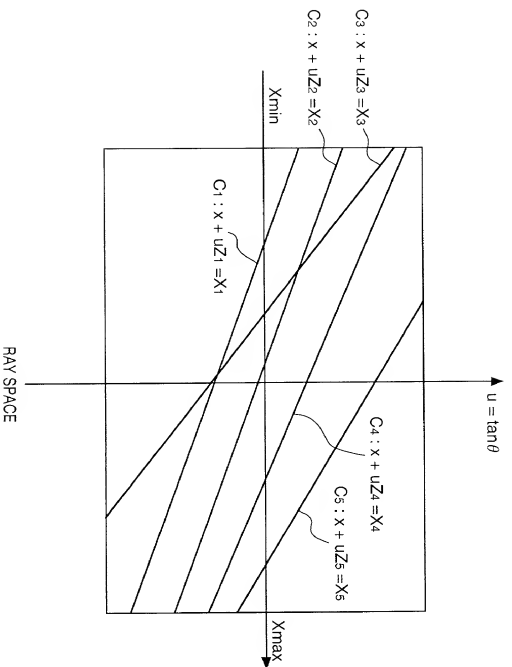


FIG. 6




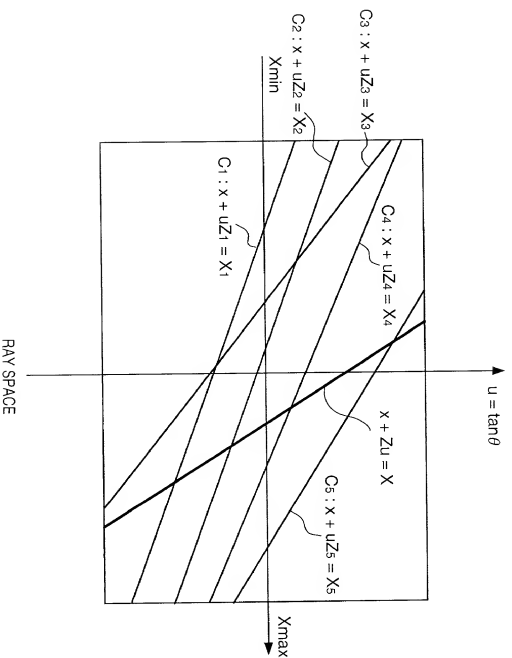


# FIG. 7

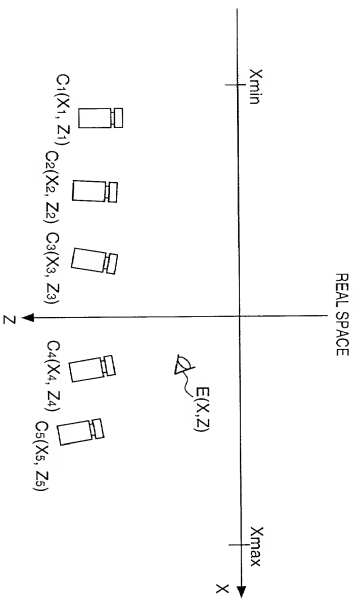

**FIG. 8**

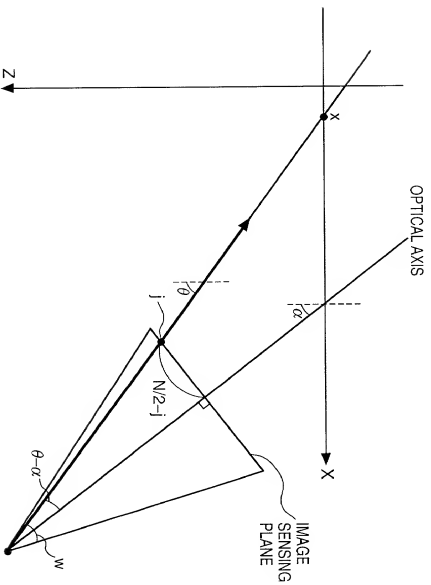

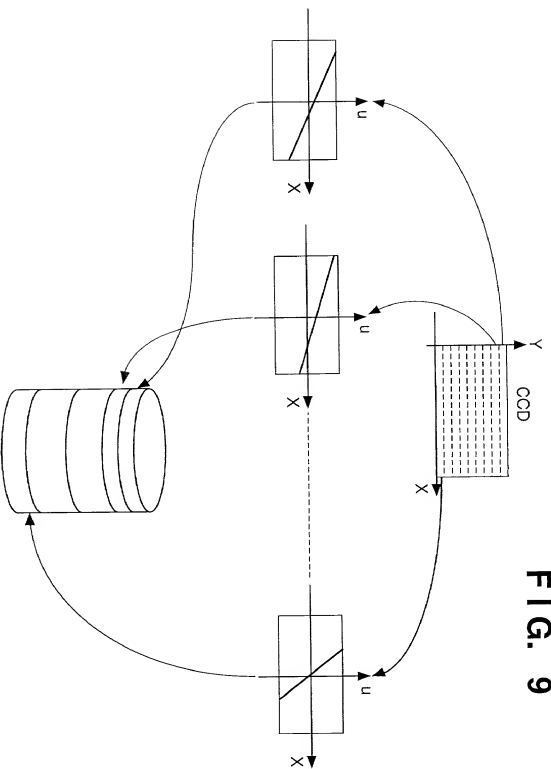

**FIG. 9**

**FIG. 10**




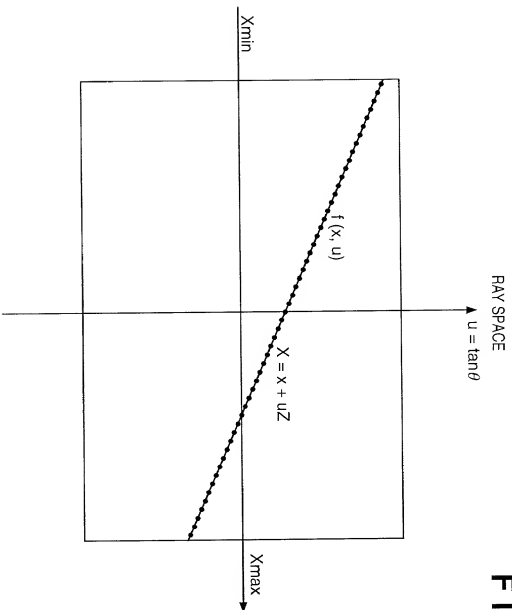


FIG. 11

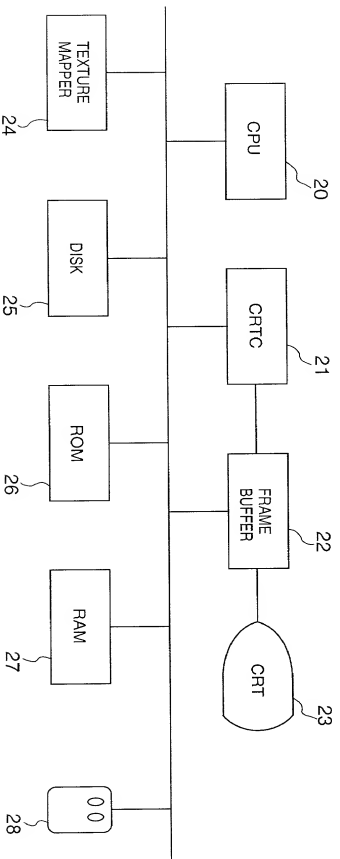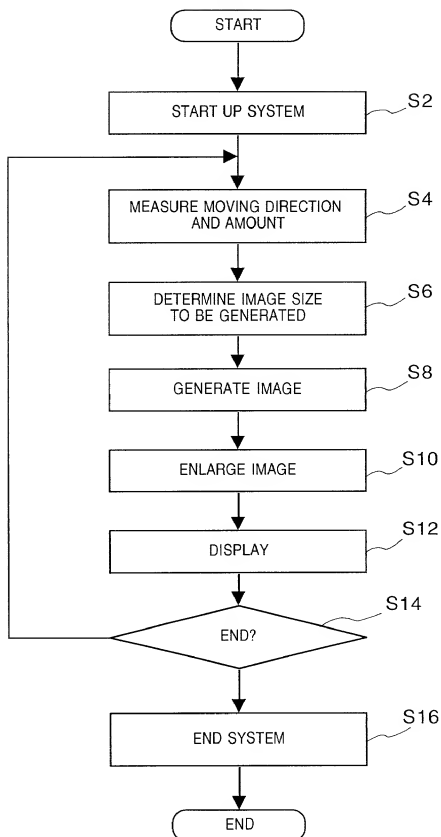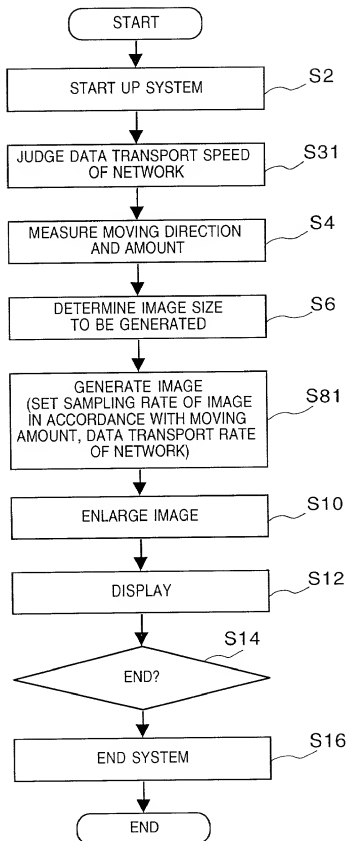

**FIG. 12**

**FIG. 13**

MPS114

**COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION**

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMAGE PROCESSING METHOD AND APPARATUS, AND STORAGE MEDIUM  
the specification of which [X] is attached hereto. [ ] was filed on \_\_\_\_\_  
as United States Application No. or PCT International Application No. \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

			(Yes/No)
Country	Application No.	Filed (Day/Mo./Yr.)	Priority Claimed
JAPAN	11-084660	26/03/1999	Yes

I hereby appoint the practitioners associated with the firm and customer number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

**FITZPATRICK, CELLA, HARPER & SCINTO**  
**Customer Number: 05514**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Akihiro KATAYAMA  
Inventor's signature Akihiro Katayama  
Date January 31, 2000 Citizen/Subject of Japan  
Residence 2-767-802, Hinodecho, Yokosuka-shi,  
Kanagawa-ken, Japan  
Post Office Address c/o Mixed Reality Systems Laboratory Inc.,  
Yokohama Hanasaki Bldg. 145, Hanasakicho 6-chome,  
Nishi-ku, Yokohama-shi, Kanagawa-ken, Japan  
F511/A601948/ald